


GP49L
front part train
126 cm long x 33 cm wide x 67 cm height
+/- 52 kg

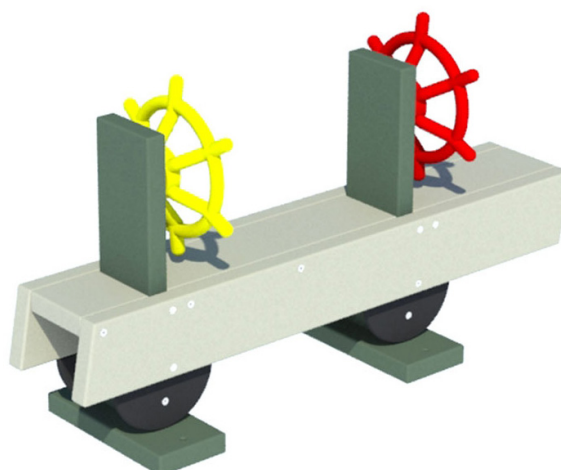

GP49W
Back part train (add-on)
120 cm long x 33 cm wide x 67 cm height
(2cm overlaps the front part)
+/- 49 kg

Mounting

The equipment is delivered fully assembled and requires no extra mounting. Anchoring on hard ground is required.

Material

- Solid boards made of recycled plastics (PE) coloured throughout (beige, green, brown)
- Stainless steel screws and nail plugs
- Replaceable plastic steering wheels (PP)

Maintenance

The plastic material requires very little maintenance, that is cleaning with soapy water and a sponge or soft brush and rinsing with water to remove dirt and soap. As the materials' water absorption is less than 0.29%, it will not get stained by oil, grease or other products. Moss and algae will not adhere easily and can easily be removed. Cleaning with high-pressure (max. 100 bar) is possible but not recommended and mostly even not necessary. Spray with a fan-shaped jet with minimum 30 cm distance from the surface. Painting or staining is useless as the material does not need extra protection and moreover the paint will not stick to the plastic.

Inspection Requirements

Visual inspection:

Weekly or monthly, depending on the intensity of use.

Functional inspection:

Monthly or four-monthly, depending on the intensity of use.

Detailed inspection:

Yearly

Special attention during functional or detailed inspection:

- Check all parts are tight.
- Check worn, loose, damaged, missing parts.
- Check screws sticking out.
- Check anchoring on hard soil.
- Steering wheels must be tightly secured.
- Vandalism?
- Space on the steering wheels

Use original Govaplast parts when repairing is required, to ensure the TÜV certificate remains valid.

Installation

The installation needs to be done on a hard and even surface. The equipment cannot be installed on a loose surface such as a sandpit, wood chips, bark mulch), unless a special bearing construction is installed (not standard).

Security Zone

An obstacle-free area of minimum 150 cm around the equipment is required.

No fall absorption surface required

The equipment's fall height is less than 60 cm. Therefore it's allowed to install it on a hard surface.

Anchoring is required

Each train part is anchored by fixing the 8 stainless steel nail plugs supplied into the countersunk holes. Place the equipment and then drill the holes for the nail plugs through the pre-drilled holes with an 8 mm stone drill. Finally place the nail plugs.


Important advice:

To drill the holes use a sharp drill and first put the plastic part of the plug in the hole. Then screw the metal nail into the plug instead of hammering it. This way, you avoid damaging the head of the nail and unfixing will be easy.



24x

Example: L+W+W

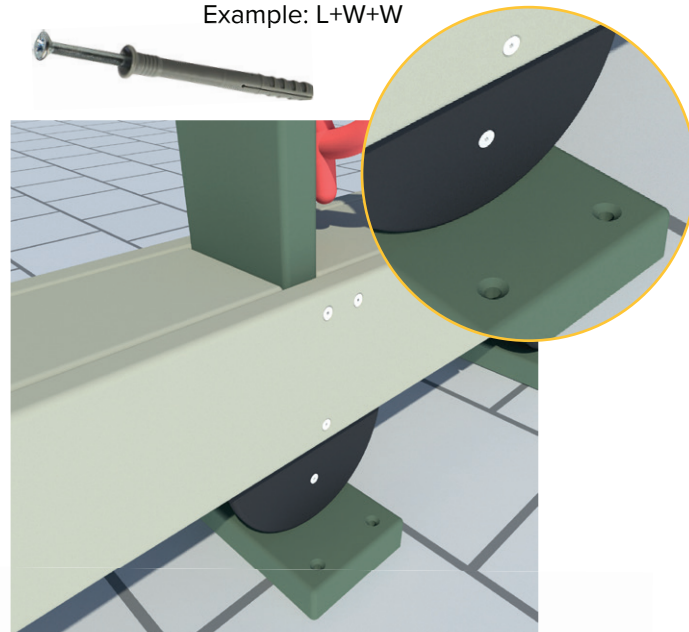


$L+W+W+W+W= 597 \text{ cm}$

$L+W+W+W= 479 \text{ cm}$

$L+W+W= 361 \text{ cm}$

$L+W= 243 \text{ cm}$

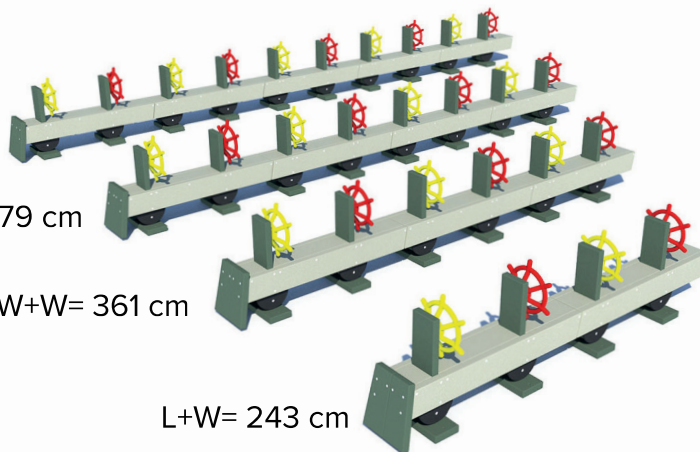

Replacement steering wheels

Through intensive use, the plastic mechanism in the steering wheel is subject to wear. The wearing of the wheel and the other plastic parts, causes play on the system involving necessary replacement after a few years.

The wheel can't come loose from the green plastic mounting plate, as the cap nut is permanently glued onto the metal shaft. Replacing the whole system is not difficult though, as the green plastic mounting plate together with the wheel can be unscrewed from the board/post/play and a new steering system can be screwed.




TYPE GOEDKEURING CERTIFICAAT
TYPE APPROVAL CERTIFICATE
Z-NL-19-04-224287-013-720302559-01REV1

Met dit certificaat wordt verklaard dat het
With this certificate it is declared that

Trein
Train

met als type aanduiding
with type indication
GP49L / GP49W

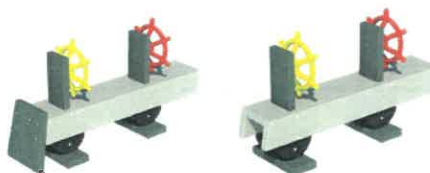

geleverd door
delivered by

Govaerts Recycling n.v.
Kolmenstraat 1324 , 3570 Alken

voldoet aan de eisen gesteld in - fulfills the requirements of:
Warenwetbesluit attracties- en speeltoestellen

is gebaseerd op volgende beoordelingscriteria
and is based on assessment criteria
EN 1176-1:2017 **EN 1176-7:2008**

Dit certificaat wordt afgegeven door TÜV SÜD Benelux bvba, aangewezen bij ministeriële beschikking
van 26.02.2019, 1487420-187346-VGP



This certificate is issued by TÜV SÜD Benelux, designated by ministerial arrangement on
26.02.2019, 1487420-187346-VGP



Accreditatie België ISO17020, I-358
Accreditation Belgium ISO 17020, I-358

Opgemaakt te – Place Boortmeerbeek op datum van - date: 05.12.2019

Naam - Name: Astrid De Beukelaer
Functie - Function: Expert Playground Equipment
Handtekening - Signature:



Benelux

Naam - Name: Emmanuel Ortegat
Functie - Function: Expert Playground Equipment
Handtekening - Signature:



Benelux

**TYPE GOEDKEURING CERTIFICAAT
TYPE APPROVAL CERTIFICATE
Z-NL-19-04-224287-013-720302559-01REV1**

Product omschrijving - Product description

Trein is een speeltoestel met stuurtjes.
Train is playground equipment with steering wheels

Typenummer - Type indication: GP49x

Trein is beschikbaar in 2 uitvoeringen. Het aanbouwdeel kunnen meerdere malen achter elkaar geplaatst worden volgens instructies in de handleiding.
Train is available in 2 versions. The attachment can be placed several times in a row according to instructions in the manual.

GP49L front part train: 126 x 33 x 67 cm
GP49W back part train: 120 x 33 x 67 cm

Afmetingen (l x b x h) - Dimensions (l x w x h): variable

Toepassingen en beperkingen - Applications and limitations

Dit attest heeft enkel betrekking tot het geïnspecteerde speeltoestel. Het rapport met nummer P-B-19-01-720302559-01-01rev2 bevat alle opmerkingen over dit speeltoestel.

Dit certificaat respecteert de richtlijnen en maatregelen die zijn opgenomen in het logboek van de fabrikant.

Wij houden eraan de uitbaters er attent op te maken dat zij op gepaste tijdstippen inspecties en onderhoud moeten uitvoeren en dit te documenteren, teneinde de toestellen en hun omgevingen in een goede staat te behouden.

Alle referenties naar documenten van het speeltoestel GP49 werden gecontroleerd.

Alle aanpassingen aan het geïnspecteerde speeltoestel, aan zijn samenstelling en de manier van samenstellen moeten voorgelegd worden aan TÜV SÜD Benelux en kunnen leiden tot een aanpassing van het certificaat.

Het is de taak van de fabrikant en/of de leveranciers om ervoor te zorgen dat alle gefabriceerde speeltoestellen van hetzelfde type als beschreven in dit certificaat conform zijn aan het model waarop dit certificaat gebaseerd is.

This certificate applies only to the inspected playground equipment. The report with number P-B-19-01-720302559-01-01rev2 contains all the comments about this playground equipment.

This certificate respects the guidelines and measures included in the logbook from the manufacturer.

We coming to make the managers alert that they need to perform inspections and maintenance at appropriate times and document this in order the devices and their environments in a good state.

All references to documents of the playground equipment GP49 were checked.



**TYPE GOEDKEURING CERTIFICAAT
TYPE APPROVAL CERTIFICATE
Z-NL-19-04-224287-013-720302559-01REV1**

All modifications to the inspected playground equipment, to its composition and the way of composing should be submitted to TÜV SÜD Benelux and can lead to an adjustment of the certificate.

It is the responsibility of the manufacturer and/or the suppliers to ensure that all manufactured playground equipment of the same type as described in this certificate comply with the model on which this certificate is based.

Documenten – Documents

Gebruikshandleiding – User's manual: GP49
Technisch constructie dossier – Technical construction file: GP49

Markering van het product - Product marking

Elk toestel dient te worden gemarkeerd met - Every product needs to be marked with:

- Naam en adres van de leverancier – Name and address of the supplier
- Bouwjaar- Year of construction
- Type

Opmerking - Remarks

In geval van discussies heeft de Nederlandse tekst voorrang.
In case of discussions the Dutch language prevails.

Einde certificaat / End of certificate